


Webasto Live

Hardware | Installation | Service | Connectivity

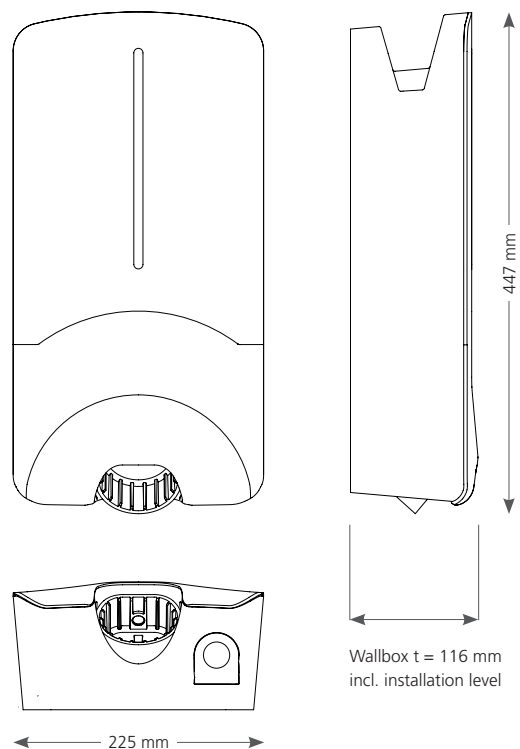

The Webasto Live boasts the following features:

- Scalable charging capacity up to 22 kW, choice of 4.5m or 7m cable length
- For all electric cars and plug-in hybrids with type 2 connectors
- MID-compliant meter for recording charges
- Future-proof with software updates
- Convenient and easy to use thanks to Plug & Charge (ISO 15118)
- Authentication at the charging station using RFID technology
- Integrated 4G modem for best coverage
- Compatible with commercially available back-end systems via OCPP 1.6
- Easy configuration using Wi-Fi hotspot
- Efficient use of the available charging capacity through local load management with up to 250 charging points and phase-accurate control
- Made in Germany for high-quality manufacturing
- Optional purchase of a Connectivity Package to enable easy user management, remote charging station control and charge data reporting

Technical specifications	
Electrical characteristics	
Nominal current (A) (configurable connected load values)	16 or 32 3-phase or single phase
Line voltage (V AC)	230 / 400 (Europe)
Grid frequency (Hz)	50
Grid forms	TN / TT / IT (only single phase)
EMV class	Emitted interference: Class B (residential, business, commercial areas) Immunity: Industrial areas
Overvoltage category	III as per EN 60664
Protection class	I
Protective devices	Country-specific residual current circuit breakers and circuit breakers must be provided for installation on site
Integrated power meter	MID-compliant, accuracy class B as per EN 50470-3 / class 1 as per IEC 62053-21
Connections	
Mounting	Wall and base mounting (permanently connected)
Cable feed	Mounted on-wall or in-wall
Connection cross-section (wire dimension)	Cross-section of the connecting cable (Cu) taking into account the local conditions and norms: 6 or 10 mm ² for 16 A and 10 mm ² for 32 A
Charging cable	Type 2 charging cable: up to 32 A / 400 VAC as per EN 62196-1 and EN 62196-2 Length: 4.5 m / 7 m – Integrated cable bracket
Output voltage (V AC)	230 / 400
Max. charging capacity (kW)	11 or 22 (depending on the variant)
Communication & features	
Authentication	– RFID reader MIFARE DESFire EV1 and MIFARE Classic (ISO 14443 A / B) – “Plug & Charge” (ISO 15118)
Display	8 RGB-LEDs, buzzer
Network interfaces	– LAN (RJ45) – 10 / 100 Base-TX – WLAN 802.11b/g - 54 Mbit/s
Mobile communications	Slot for SIM card (form factor 3FF / Micro-SIM), integrated 4G modem (LTE)
Other interfaces	– Modbus (RS485) (for reading external power meters) – USB 2.0 type A (for servicing only) – USB 2.0 type B (for servicing only)
OCPP	Version 1.6
Plug & Charge	ISO 15118-1, ISO 15118-2
Local charge management	Up to 250 charging points, dynamic, adjustment with no phase delay
Mechanical data	
Dimensions (W x H x D) (mm)	225 x 447 x 116
Weight (kg)	4,4 - 6,8 (depending on the variant)
IP protection class, device	IP54
Protection against mechanical impact	IK08
Ambient conditions	
Operating temperature range (°C)	-25 to +40 (without direct solar radiation)
Temperature behavior	A reduction in charging current or shutdown may occur in order to prevent the charging station overheating.
Storage temperature range (°C)	-25 to +70
Permissible relative humidity (%)	5 to 95 non-condensing
Altitude (m)	Max. 2,000 above sea level
Certification compatibility	
Standards and guidelines	– CE conformity – 2014/53/EU Radio Equipment Directive – 2011/65/EU RoHS Directive – 2001/95/EG General Product Safety – 2012/19/EU Waste Electrical and Electronic Equipment Directive – 1907/2006 REACH Regulation
Tested OCPP backends	Webasto, Allego, has.to.be, Fortum, Bouygues, Virta, ChargeCloud, Ladenetz, ChargeIT, NTT, Drivz, Char.gy